


FIGURE 1: TEXT SIDE "A"



FIGURE 2: TEXT SIDE "B"

POSITION NUMBER	TIED TO:		
24	10	21	7
12	23	9	20
25	11	22	8
18	4	15	1
6	17	3	14
19	5	16	2


FIGURE 3: PIN CONFIGURATION

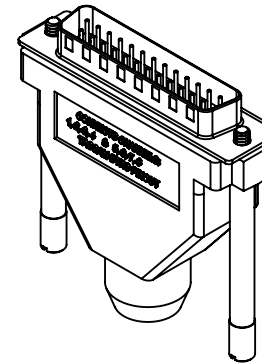

NOTES:

- MATERIAL:**  
DB25M INSULATOR: P.B.T. UL 94-V0 RATED, BLACK  
DB25M CONTACTS: BRASS, GOLD FLASH  
OVERMOLD: BUTYRATE, 94HB RATED, BLACK
- SPECIFICATIONS:**  
CURRENT RATING: 1A MAX  
DIELECTRIC WITHSTANDING VOLTAGE: 500 V(AC)  
OPERATION TEMPERATURE RANGE: -40°C TO +65°C  
STORAGE TEMPERATURE RANGE: -40°C TO +70°C
- THIS PRODUCT IS RoHS COMPLIANT.

**CUSTOMER DRAWING**

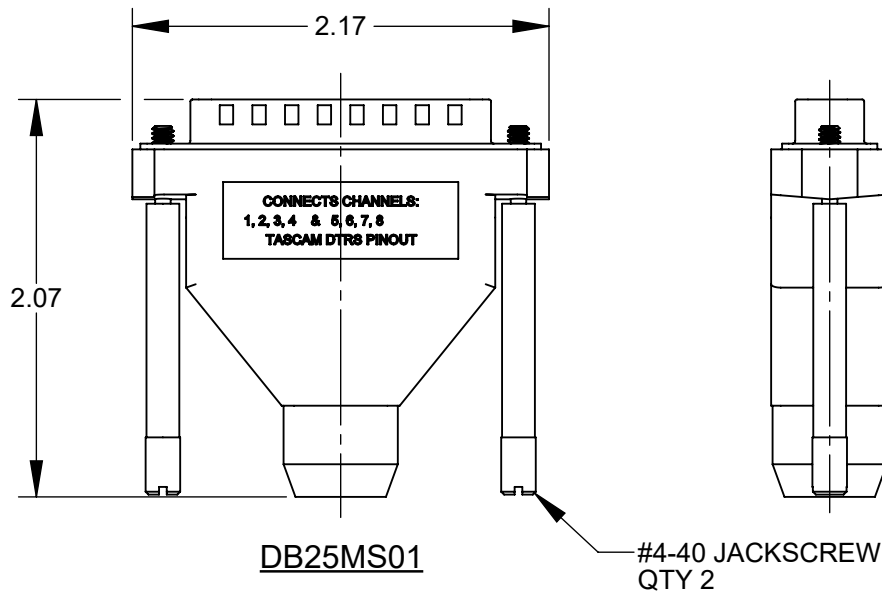

					<div>UNLESS OTHERWISE SPECIFIED</div> <div>1. ALL DIMENSIONS IN INCHES</div> <div>- TWO PLACE DECIMALS     ±0.02</div> <div>- THREE PLACE DECIMALS   ±0.005</div>	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC., AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.														
						SIZE	WIDTH		MULT		LBS/M		TEMPER							
						FINISH						MATERIAL								
						SPEC No.						SPEC No.								
						FIRST USED ON				SCALE 1:1		<div>Switchcraft®</div>								
						DATE DRAWN	BY	CHKD		APVD										
A	28595	6/7/23	NZ	TJK		5/13/08	JGK	NZ 4/21/23		NZ 4/21/23		SHEET    1                      OF    1								
REV	ECO NUMBER	DATE	BY	APVD	NAME                      DB25M MULT						PART No.				REV					
REVISIONS					DO NOT SCALE DRAWING					CONNECTOR/SPLITTER, RoHS						DB25MS01				A