
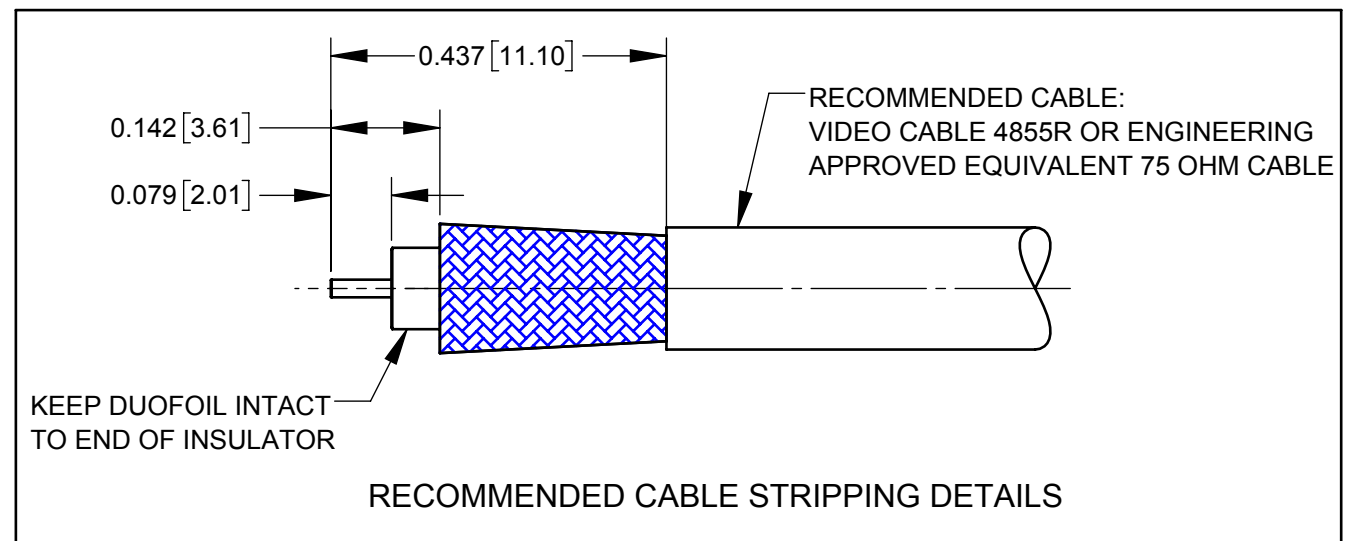


DIMENSIONS SHOWN FOR REFERENCE ONLY

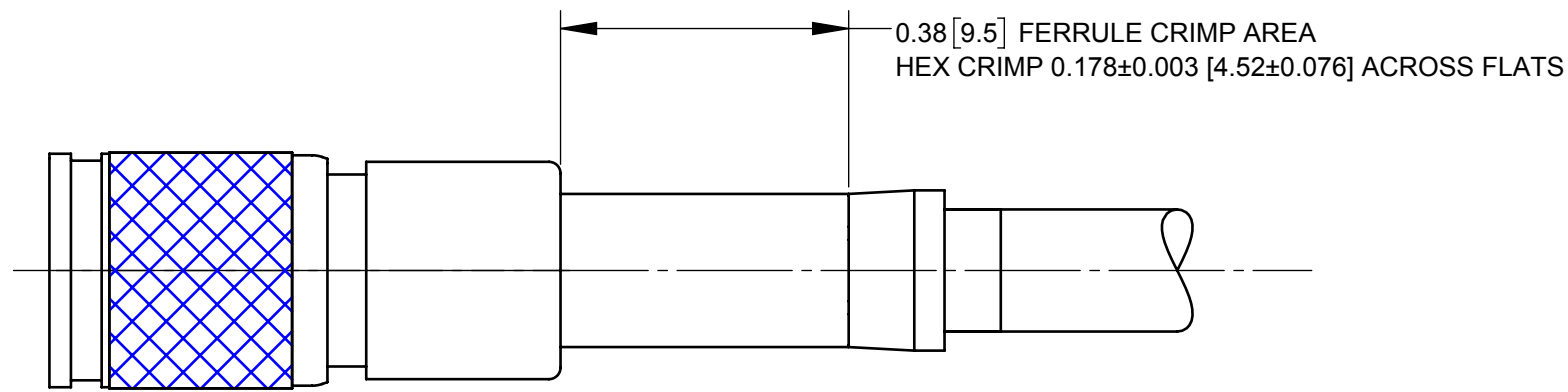

NOTES:

1. MEETS SMPTE 2082-1
 CHARACTERISTIC IMPEDANCE: 75 OHMS
 CONTACT RESISTANCE: 50 MILLIOHMS MAX.
2. MATERIAL:
 BODY: COPPER ALLOY, NICKEL PLATED.
 CONTACT PIN: COPPER ALLOY, GOLD PLATED.
 SPRING: BERYLLIUM COPPER, NICKEL PLATED.
 TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
 INSULATOR: TEFLON
 FERRULE: COPPER ALLOY, NICKEL PLATED.
3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
					SIZE	WIDTH	MULT	LBS/M	TEMPER
					UNLESS OTHERWISE SPECIFIED			MATERIAL SEE NOTES	
					1. ALL DIMENSIONS IN INCHES			SPEC No.	
					- TWO PLACE DECIMALS ± 0.02			SCALE 4:1	
					- THREE PLACE DECIMALS ± 0.005			Switchcraft®	
					DATE DRAWN	BY	CHKD	APVD	SHEET 1 OF 1
					04/05/17	PNK	04/05/17	04/05/17	
					NAME			PART No.	
					UHD DIN 1.0/2.3 PLUG			UHDIN55	
					75OHMS, 4855R, RoHS			REV 0A	
0A	PDR 16006	04/05/17	PNK	SRC	DO NOT SCALE DRAWING				
REV	ECO NUMBER	DATE	BY	APVD					
REVISIONS									