




06AL5FX
5 CONTACTS AT 180°

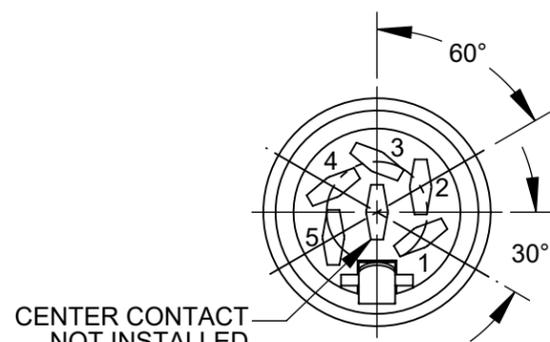


13AL5FX
5 CONTACTS AT 240°








13AL6FX
6 CONTACTS AT 240°



15AL7FX
7 CONTACTS AT 270°

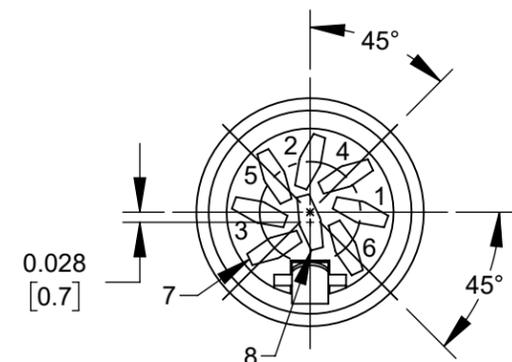

15AL8FX
8 CONTACTS AT 270°

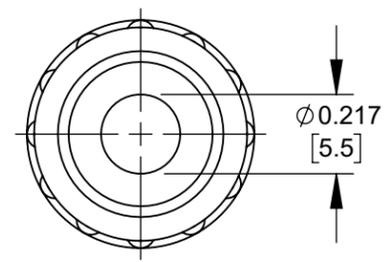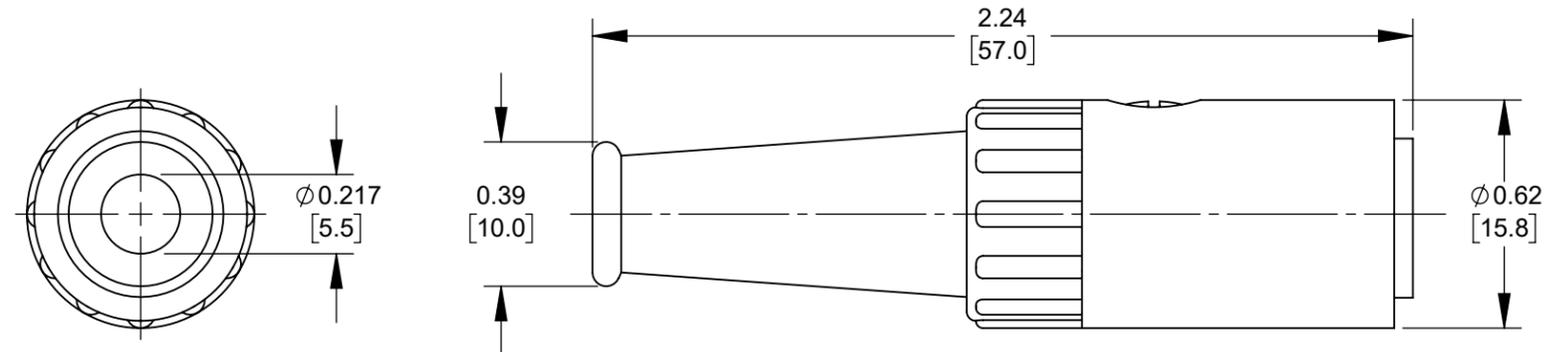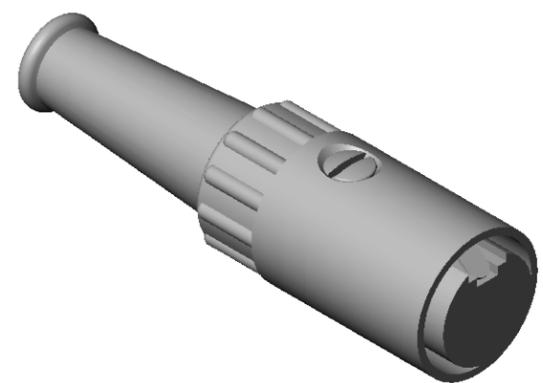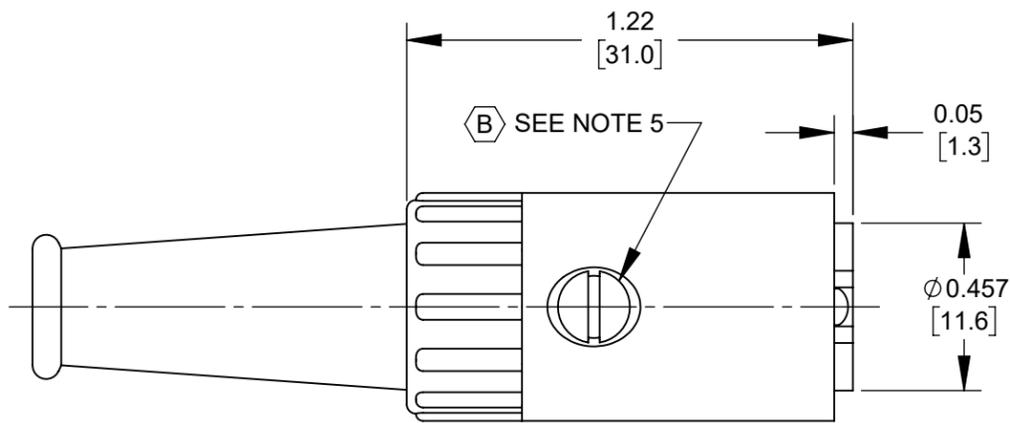

- NOTES:
1. SHIPPED ASSEMBLED.
 2. 0.04 [1.0mm] X 0.07 [1.7mm] SLOT IN CONTACTS FOR SOLDERING.
 3. MATERIALS:
HOUSING - ZINC ALLOY, NICKEL PLATED
INSERT - THERMOPLASTIC, BLACK
CONTACTS - COPPER ALLOY, TIN PLATED
FLEX RELIEF - THERMOPLASTIC, BLACK
CABLE CLAMP - STEEL, NICKEL PLATED
SCREW - STEEL, NICKEL PLATED
 4. THESE PRODUCTS ARE RoHS COMPLIANT.
 5. SCREW DRIVE MAY BE SLOTTED, CROSS RECESS, T8, COMBINATION SLOTTED/CROSS RECESS OR COMBINATION SLOTTED/T8.

REV	ECO NUMBER	DATE	BY	APVD
B	28667	3/28/24	PC	TJK
A	26000	3/3/06	TJK	TJK

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES [mm]

- TWO PLACE DECIMALS ±0.02 [0.5]

- THREE PLACE DECIMALS ±0.005 [0.13]

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE	WIDTH	MULT	LBS/M	TEMPER					
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON					SCALE				
					2:1				
DATE DRAWN	BY	CHKD TO	APVD TJK						
10-Jun-13	TO	6-10-13	6-10-13						
NAME					PART No.				
FEMALE DIN 5-8 PIN CORD PLUG CONNECTOR, RoHS					06AL_FX, 13AL_FX, 15AL_FX_SERIES				
					SHEET 1 OF 1				
					REV B				

CUSTOMER DRAWING