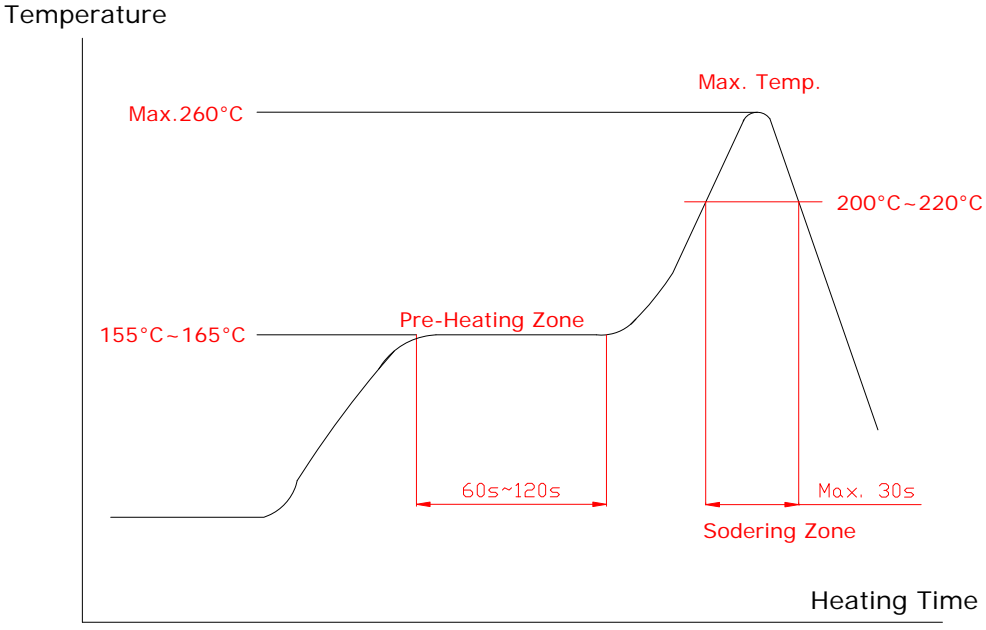


| 6-3-5 | Solderability | <p>The termination should be 95% covered with new continuous solder coating</p> <p>Solder temperature: $245 \pm 5^{\circ}\text{C}$</p> <p>Test time: 3 ± 0.5 seconds per EIA364-26A</p> | No physical damage to the connector |
|-------|------------------------------|---|-------------------------------------|
| NO. | Test Item | Specification | Test Condition |
| 6-3-6 | Resistance to IR reflow heat | <p>When exposed to the following re-flow soldering condition, there shall be no any excessive thermal damage on the every part of connector.</p> | No physical damage to the connector |
| | |  | |